


INSTALLATION INSTRUCTIONS

TRIUMPH CONSOLE

1. To allow the wires to pass from the lighter and speaker to the rear of the instrument panel, drill a 1/4" hole in the rear of the shift lever housing.
2. Pull the emergency brake full on, put shift lever into 3rd gear, remove knob, then slip the console over the brake lever and to the rear into position. If the emergency brake does not come high enough to allow the console to slip into position then loosen the emergency brake adjusting nuts at the rear wheels.
3. With the console held tightly down against the drive shaft tunnel, under the brake lever, and forward until the front edge of the console touches at the base of the raised section of the shift lever. Cut out hole, mark, through the two forward holes in the front sides of the console onto the housing. NOTE: Be sure the console is held down tightly in position.
4. Drill at these points with a #28 (.140) drill and install self-tapping screws.
5. Now with the console in position, drill with a #36 drill at the rear of the speaker and install sheet metal screws and washers.
6. Drill the hole on each side with a #36 drill and install the sheet metal screws and washers.
7. Connect the ground wire of the cigarette lighter (attached to the clip on the side of the lighter receptical) to any convenient grounding location on the frame or body of the vehicle. Be sure that the grounding connection is clean and free from grease or paint.
8. Connect the terminal wire of the cigarette lighter by passing the end through the rubber grommet in the upper right hand corner of the fire wall and connect to the fuse block on the lower fuse.

NOTE: If the wire sparks when the connection is made (WITHOUT THE LIGHTER KNOB PLUGGED IN) check the lighter wire lead and terminal for short circuit and ground.

9. Connect the speaker wires to the speaker leads. If two speakers are desired, connect wires as shown:

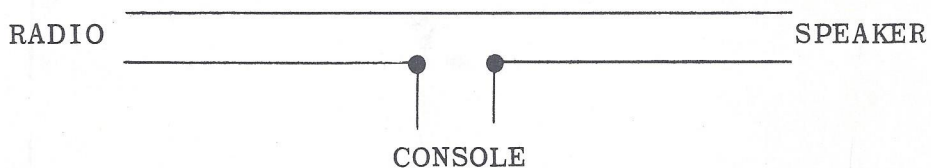

10. Be sure to re-adjust the emergency brake adjusting nuts.